


PARTS & ACCESSORIES LIST

DESCRIPTION	PRODUCT CODE	AVAILABLE COLOURS
3 Metre CD8550 2-Channel Wall Duct	CD8550/3	All parts are available in the following Stocked Colours: Pearl White and Natural Anodised. We can also powdercoat using any colour within the Dulux or Interpon Range of Powdercoatings, please allow a turnaround of 10 working days for custom colours. Contact us for further information.
4 Metre CD8550 2-Channel Wall Duct	CD8550/4	
5 Metre CD8550 2-Channel Wall Duct	CD8550/5	
6 Metre CD8550 2-Channel Wall Duct	CD8550/6	
We also have a number of different accessories to suit our CD8550 Wall Duct:		
End Cap to suit CD8550 Wall Duct includes 2 x Painted End Cap Screws	CD8550E	
Outlet Mounting Shroud to suit CD8550 Wall Duct	CD8550OC	

CD-8550 : Wall Duct

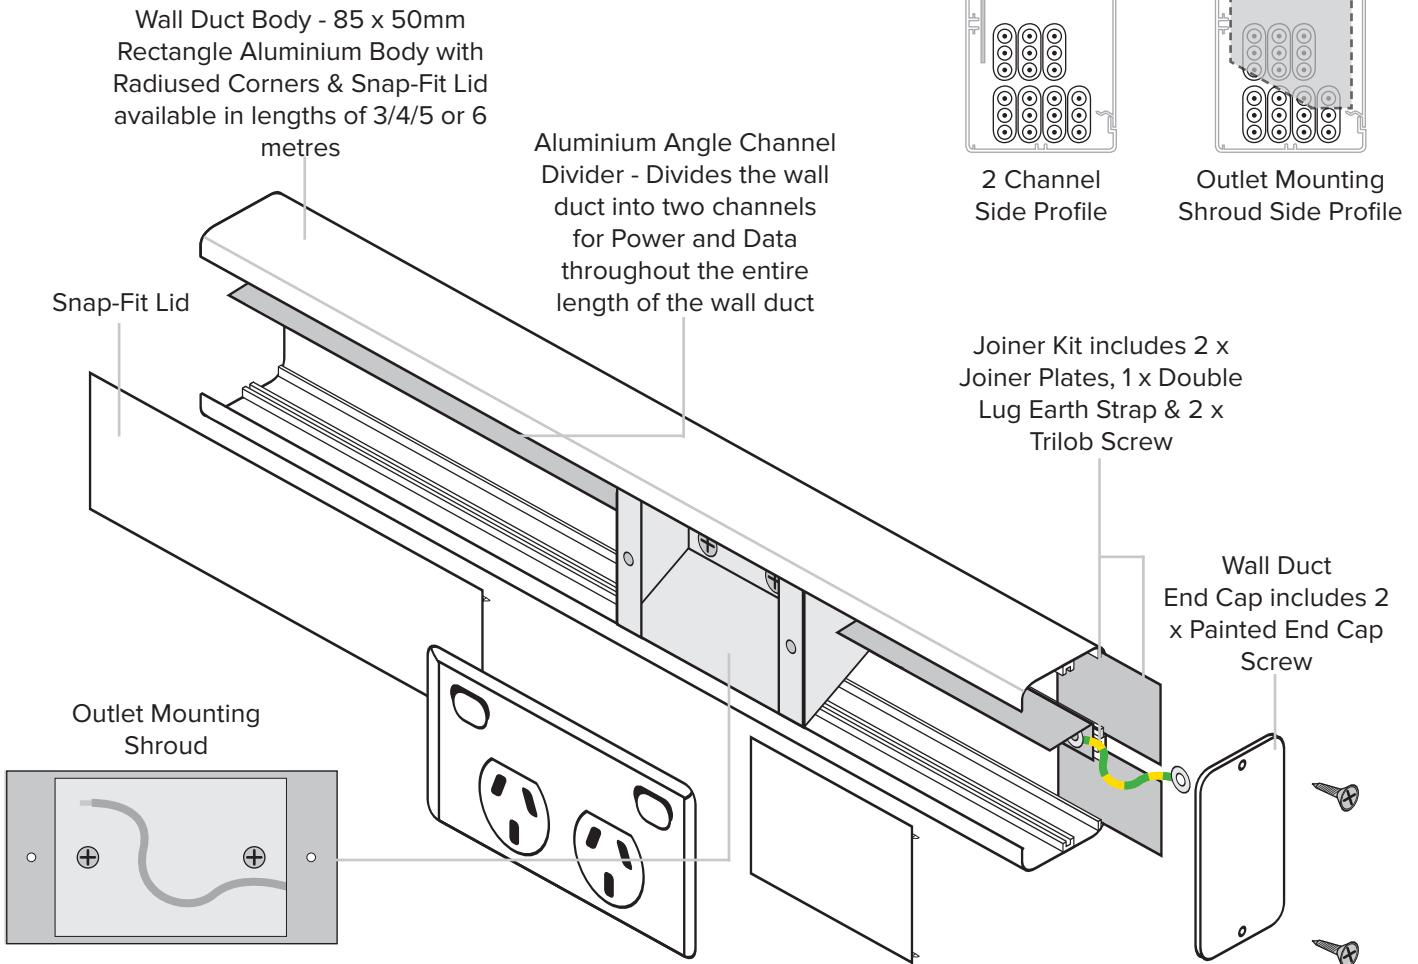

Outlets are not included. All Dimensions quoted are nominal only. Drawings, images and diagrams are for illustrative purposes only and are not to scale. Product details and dimensions are subject to change without notice. This product is not suitable for use in wet areas, is intended for use with fixed wiring only and must be installed by a licensed electrical mechanic in accordance with AS3000, SAA Wiring Rules and A.C.A Requirements





STEP 1. PREPARATION, JOINING & MOUNTING WALL DUCT

- Remove Snap-Fit Lid
- Mount in a safe & suitable position. Wall Duct can be mounted Horizontally or Vertically and even Stacked for larger cabling requirements
- Connect multiple lengths of Wall Duct using the Joiner Kit supplied. Slide the 2 x Joiner Plates into the interlocking channels and connect Wall Duct lengths together. Screw-fix Double Lug Earth Lead to both lengths to maintain earth continuity.

STEP 2. INSTALLATION OF OUTLET MOUNTING SHROUD & OUTLETS

- Remove Channel Divider (Not applicable if you have ordered single-channel Wall Duct)
- Measure and remove section of Channel Divider where Outlet Mounting Shrouds are to be placed
- Screw-fix Outlet Mounting Shroud to Centre Fixing channel and replace Channel Divider
- Measure and cut Snap-Fit Lid to fit either side of the Outlet Mounting Shroud. Replace Snap-Fit Lid
- Terminate outlets as required (as per AS3000) fixing them to the mounting bracket supplied and ensuring all metal components maintain earth continuity.

IMPORTANT: NEVER MOUNT OUTLETS DIRECTLY TO THE SNAP-FIT LID. IF OUTLETS MUST BE FIXED TO THE WALL DUCT WITHOUT THE USE OF AN OUTLET MOUNTING SHROUD, THEY SHOULD BE FITTED TO THE SOLID SIDE OF THE WALL DUCT BODY

STEP 3. FINISHING

- Fit Wall Duct End Caps (where applicable) using the 2 x Painted End Cap Screws.

